**Unit no. BPR-01**

IKM Testing AS

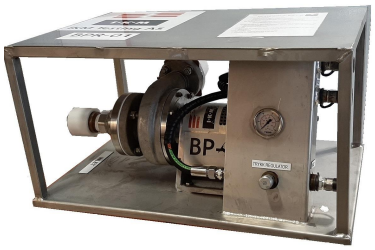

# BOOSTER LiN - LiN FILLING PUMP

## *Dimensions*

Length(mm).....: 800 Width(mm).....: 500 Height(mm).....: 400
Weight (kg).....: 69
Lifting/ Transportation.....: Mounted in frame. Transportation on pallet

## *Area of use / certification*

Onshore/offshore.....: Offshore
Standard.....: Atex

## *Pump(s)*

Pump1 (type).....: CS & P CSP 100

## *Flow / Pressure / Volume*

Q-max (l/min).....: 500
P-max (bar).....: 8

## *Connections*

Inlet connection.....: ACME 150
Outlet connection.....: ACME 150

## *Power supply*

Hydraulic Supply.....: 3 ea HS525 IF Male Quick connection (Inlet/Outlet/Leak)
Hydraulic Supply: Max flow 40 ltr/min. Max pressure 120 bar

## *Additional information*

Equipment / Functions.....: Hydraulic driven pump.
Frame and wet part in acid resistant material

Functions:
- Pressure / flow regulator on hydraulic supply
- Pressure gauge on hydraulic supply