Unit no. LBM-003

IKM Testing AS

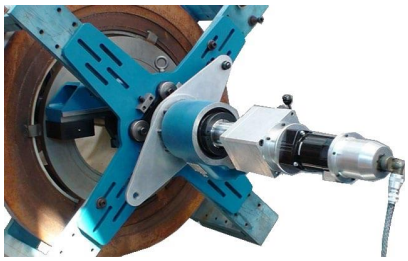

LINE BORING MACHINE

Dimensions

Length(mm).....	1280	Width(mm).....	880	Height(mm).....	915
Weight - (kg).....	634				
Lifting/ Transportation.....	Shipped in 2 containers + HPU.				

Area of use / certification

Onshore/offshore..... Offshore

Type

Description..... Hydraulic driven line boring machine
Fabricator..... Climax
Model..... BB6000
Serial no..... 9151

Flow / Pressure / Volume

Minimum bar length (mm)..... 1130.3
Max bar length (mm)..... 3048.0
Minimum drill hole Ø (mm)..... 223.5
Max drill hole Ø (mm)..... 1036.3

Power supply

Power (Electrical/Hydraulic)..... Hydraulic

Additional information

Equipment / Functions..... Hydraulic supply : 37,9 l/min @ 246 bar
Rotational Drive Unit 6:1 gear ratio reduction

Machine can be used for line boring, drilling, facing, conventiocal boring and grooving.

Quick and Easy Setup
• Modular components make setup quick and easy.
• Fast and easy setup using high quality cast-iron set-up cones and spherical bearing mounts.
• Patented spherical bearing mounting system allows quick setup, with up to 5° of bearing misalignment.
• Typical set-up time for an experienced operator is 30 minutes or less.